

▼ ETT400 Turntable



ETT Series

Maximum Capacity:

225 - 450 tons

Cylinder Capacity:

25 tons

Maximum Operating Pressure:

10,000 psi



Safe and controlled rotation

The ETT-Series is your solution for rotating heavy loads during, before or after a lifting and skidding operation.


- Safe and controlled rotation of heavy loads
- Easily change rotation direction
- Dual capacity: 225 tons with one cylinder, 450 tons with two cylinders
- Compact size for use in applications with limited space
- Compatible with standard Enerpac pumps
- Hardwood surface.



SFP-Series, Split-Flow Pumps

Split-Flow pumps distribute an equal amount of hydraulic oil to a maximum of 8 outlets. Smart valve technology allows both controlled lifting and lowering of heavy loads.

Page:  342

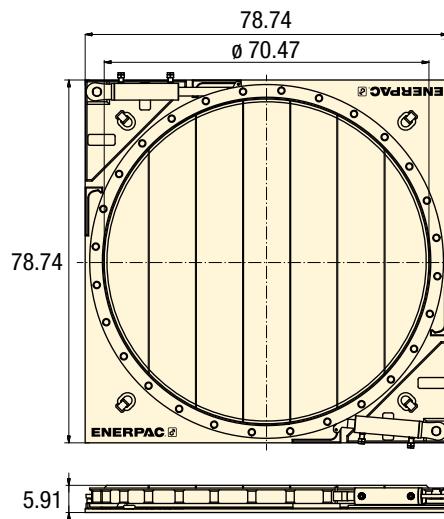

LH-Series, Low-Height Skidding

The ETT-Series are ideal in combination with our skidding systems, particularly the LH-Series. Skidding and rotating in confined spaces is simplified.



Page:  366



Telescopic Hydraulic Gantry

The ETT-Series in combination with our hydraulic gantry SL-Series makes load handling in the most demanding situations easy.

Page:  364

▼ SELECTION CHART

Maximum Load Capacity	Model Number	Cylinder Capacity *	Cylinder Oil Capacity * (in³)		No. of Cylinders *	Rotation per Stroke	Platform Diameter	
(tons)		(tons)	advance	retract		(degrees)	(in)	(lbs)
225	ETT200	25	48.3	21.0	1	12.5	70.47	3748
450	ETT400	25	48.3	21.0	2	12.5	70.47	3803

* Per cylinder. Cylinder model number: **BRD259-ETT**