

▼ SFP414SJ and SFP403SJ (Gauges and retract valves not shown)



Multiple Outlets with Equal Flow for Lifting and Lowering

- **2, 4, 6 or 8 split-flow outlets**
- **Individual or simultaneously operation of valves, with advance/hold/retract function**
- **Joystick (manual) controlled or pendant (solenoid) controlled valves**
- **Flow per outlet ranging from 20 to 153 in³/min at 10,000 psi**
- **For double- and single-acting cylinders**
- **Adjustable pressure relief valve per circuit**
- **Reservoir sizes: 2.5, 10 or 40 gallons**
- **All models include pressure gauges.**

▼ Step-by-step stage lifting an old windmill using double-acting RR506 cylinders powered by a split-flow pump.



Typical Split-Flow Pump Applications

For lifting and lowering applications on multiple points, Split-Flow Pumps are a far better alternative than using independently operated pumps. Where synchronization of maximum 4% is acceptable, Split-Flow Pumps are a safe and economical solution.

The SFP-Series pumps feature both single and synchronized multiple outlet control either through joystick or pendant operation.

Application examples:

- Bridge deck lifting for bearing maintenance
- Stage lifting in construction and shipbuilding
- Skidding to move structures and buildings
- Levelling of constructions such as wind turbines.



Remote Control Pendant


Split-Flow pumps with solenoid valves include a remote pendant with selector switches for each individual outlet, allowing single or multiple cylinder operation.




Split-Flow Pump Synchro Kits

Split-Flow Pump Synchro Kits connect and electronically synchronize each lift point of a single Split-Flow Pump or multiple Split-Flow Pumps under one control system.


Split-Flow Hydraulic Pumps

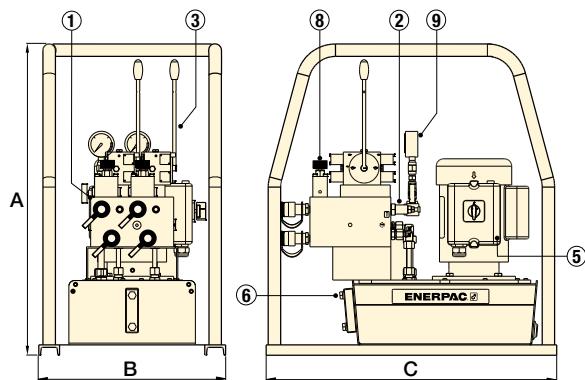

► SFP-Series with 2.5 gallons reservoir (shown with 2 split-flow outlets)

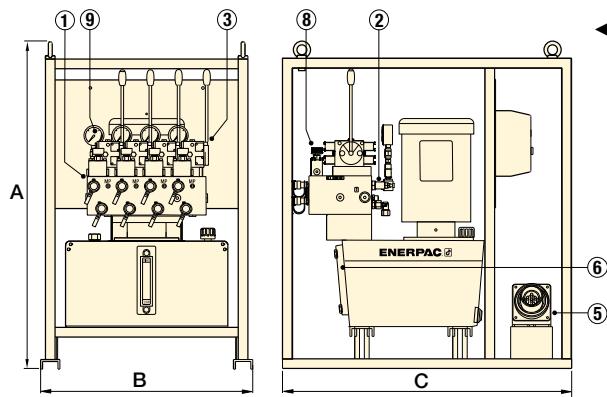

► SFP-Series with 10 gallons reservoir (shown with 4 split-flow outlets)

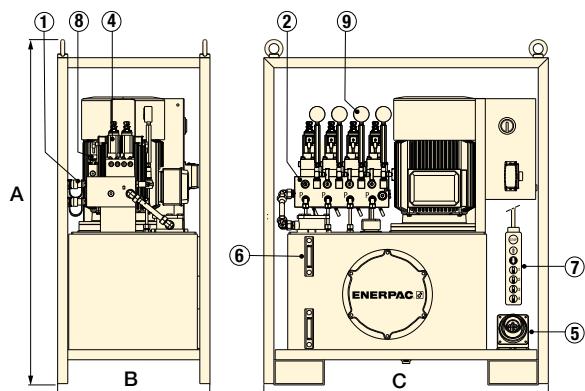

► SFP-Series with 40 gallons reservoir (shown with 4 split-flow outlets)

SFP Series



Reservoir Capacity:

2.5, 10 or 40 gallons

Split-Flow Outlets:

2, 4, 6 and 8 outlets

Flow at Rated Pressure:

20 - 153 in³/min

Motor Size:

1 - 20 hp

Maximum Operating Pressure:

10,000 psi



Lifting Cylinders

For a complete line of Enerpac cylinders, see the Cylinder and Lifting Products in our catalogue.

Page:  5

- ① Manifold with split-flow outlets and CR400 couplers
- ② Adjustable pressure relief valve per circuit
- ③ Manual 4/3 control valves with joysticks
- ④ Solenoid 4/3 control valves (24 VDC)
- ⑤ Power socket
- ⑥ Oil sight gauge(s)
- ⑦ Remote control pendant with 16 feet cord
- ⑧ Return flow control valve in each circuit
- ⑨ Hydraulic pressure gauge in each circuit



Motor Voltage

Motor voltage is specified by the last letter in the model number.

Other motor voltages are available from Enerpac. Change "J" in the model as follows for other options:

G = 208-240V, 3 ph, 50-60 Hz

W = 380-415V, 3 ph, 50-60 Hz

Number of Split-Flow Outlets	Usable Oil Capacity (gal)	Oil Flow per Outlet at 10,000 psi (in ³ /min)	Pump Model Number		Motor Size 460 V, 3ph 60 Hz (hp)	Dimensions (in)			
			4/3 Valve Operation Manual (Joystick)	24 V Solenoid (Pendant)		A	B	C	
2	2.5	20	SFP202MB	-	1.0 *	29.4	17.7	27.6	253
4	10	22	SFP403MJ	SFP403SJ	3.0	40.0	25.2	38.2	565
	40	65	-	SFP409SJ	7.5	53.4	23.8	45.7	1045
	40	101	-	SFP414SJ	10	53.4	23.8	45.7	1078
	40	153	-	SFP421SJ	15	53.4	23.8	45.7	1311
6	40	94	-	SFP613SJ	15	53.4	31.7	47.2	1236
8	10	22	-	SFP803SJ	7.5	45.8	32.7	43.8	990
	40	94	-	SFP813SJ	20	53.4	31.7	47.2	1364

* SFP202MB with 115 V, 1 phase, 60 Hz motor.

▼ SFP-Series Split-Flow Pump Kit Components



Junction Box

SFPKSS4 and **SFPKSS8** junction boxes consolidate the signals from pressure and stroke sensors, allowing the master control box to synchronize the lifting operation.



SFPKMN, Master Control Box

All SFP-Series Synchro Kits include a master control box to allow the operator to easily monitor and control a multi-point synchronized lift and adjust individual lift points as needed. All master control boxes feature an industrial grade touch screen and a user-friendly interface.



EVO-SC, Stroke Sensor Cables

Can be connected together for additional length. Ordered separately, requires one for each stroke sensor.

Model Number	Length (ft)	Model Number	Length (ft)
EVO-SC-6	19.7	EVO-SC-25	82



EVO-WSS, Wire Stroke Sensors

Provides stroke feedback to controls. Includes magnets for mounting. Ordered separately, requires one sensor for each lifting point. Available in measuring range from 14.8 to 39.4 inches.

Model Number	Range (in)	Model Number	Range (in)
EVO-WSS-375	14.8	EVO-WSS-1000	39.4
EVO-WSS-500	19.7	-	-



Communication Cables

EVO-COMM-Series communication cables transfer information about the synchronized lift operation from the master control panel to each of the connected split-flow pumps.

Model Number	Length (ft)	Model Number	Length (ft)
EVO-COMM-25	82	EVO-COMM-75	246
EVO-COMM-50	164	EVO-COMM-100	328



Split-Flow Pumps Kits

SFP-Series kits are customized from standard components to meet the needs of your unique applications. On the next page is the guide to help you choose the right components to upgrade or expand your equipment based on your application needs.

Contact your regional Enerpac representative / territory manager for support with your specific project.

Split-Flow Pump Network Kits

Split-Flow Pump Network Kits connect multiple Split-Flow Pumps under one control system.

Split-Flow Pump Synchro Kits

Split-Flow Pump Synchro Kits connect and electronically synchronize each lift point of a single Split-Flow Pump or multiple Split-Flow Pumps under one control system.

Split-Flow Pump Network Kits




Upgrading Split-Flow Pumps

To network multiple SFP-pumps together with standard function see drawing and table ①.


To upgrade a single SFP-pump to synchronous lift capability, see drawing and table ②.

To upgrade and network multiple SFP-pumps together with synchronous lift capabilities, see drawing and table ③.


① Networked SFP-Pumps in Standard Operation

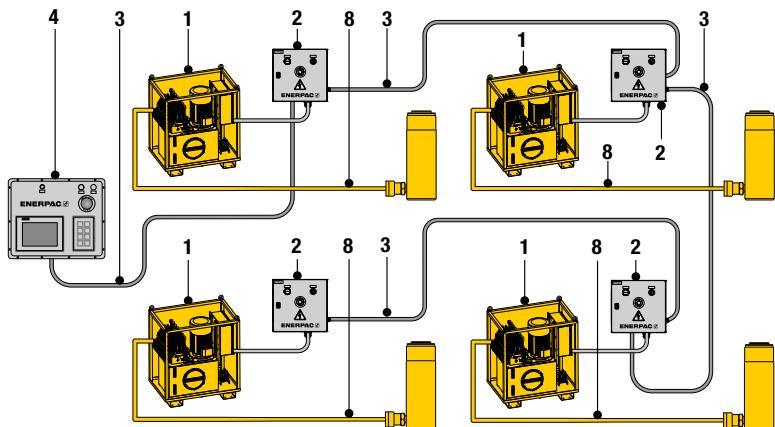

② Single SFP-Pump in Multiple-Point Synchronous Lifting Operation

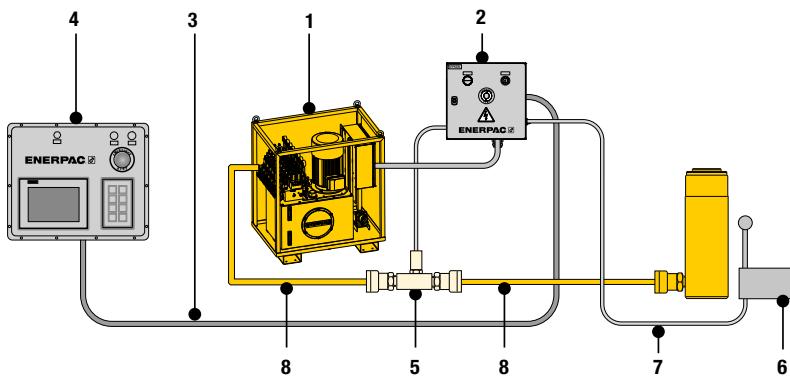

③ Networked SFP-Pumps in Multiple-Point Synchronous Lifting Operation

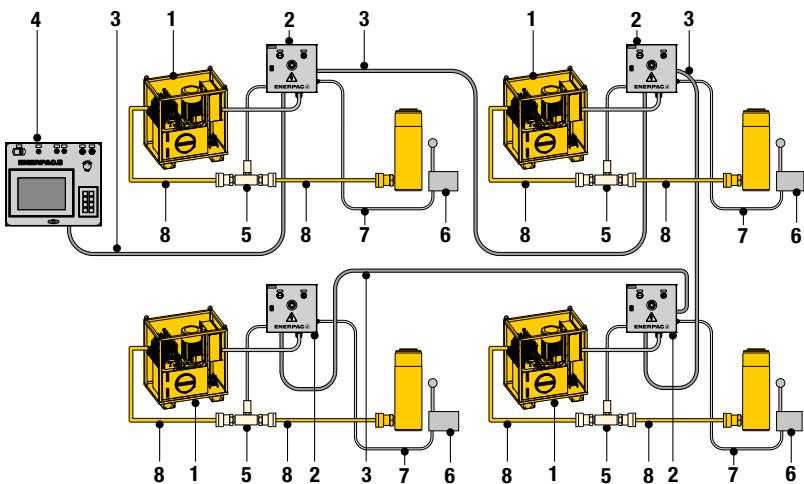

SFP Series



Multiple Pumps in Network System:

1 - 4 pumps

Maximum Lifting Points:

32x cylinders

① Networked SFP-Pumps in Standard Operation

Nr.	Qty	Model No. & Description
1	4x	SFP...SJ Pumps with solenoid valves
2	4x	SFPKSN Junction Box, 1x per pump
3	4x	SFPCOMM-25 Communication Cable, 1x per pump
4	1x	SFPKMN Master Control Box
8		HC700-Series, Hydraulic Hoses

② Single SFP-Pump in Multiple-Point Synchronous Lifting Operation

Nr.	Qty	Model No. & Description
1	1x	SFP...SJ Pump with solenoid valves
2	1x	SFPKSS4 Junction Box for 2-4 lifting points or SFPKSS8 for 6-8 lifting points
3	1x	SFPCOMM-25 Communication Cables
4	1x	SFPSSC Single Slave Control Box
5		SFPKPT Pressure Transducer Kit (1x per cylinder A-port)
6		EVO-WSS-XXX Stroke Sensor, 1x per cylinder
7		EVO-SC-25 Stroke Sensor Cable, 1x per cylinder
8		HC700-Series, Hydraulic Hoses

③ Networked SFP-Pumps in Multiple-Point Synchronous Lifting Operation

Nr.	Qty	Model No. & Description
1	4x	SFP...SJ Pump with solenoid valves
2	4x	SFPKSS4 Junction Box, 1x per pump, for 2-4 lifting points or SFPKSS8 Junction Box for 6-8 lifting points
3	4x	EVO-COMM-XXX Communication Cable, 1x per pump
4	1x	EVOMASTER Master Control Box
5		SFPKPT Pressure Transducer Kit, 1x per cylinder A-port
6		EVO-WSS-XXX Stroke Sensor, 1x per cylinder
7		EVO-SC-25 Stroke Sensor Cable, 1x per cylinder
8		HC700-Series, Hydraulic Hoses