



# KITCHEN'S CRANE & EQUIPMENT

## 2022 Goldhofer PST/SL

2022 Goldhofer PST/SL-E6 (12x04)

Total: 12 axle lines

1 x PPU : 490Hp

1 x Remote Control\*

These trailers have a special option in which Rear Driven axle lines can be moved to the front side. It is very useful on tilting roads.

When self-propelled vehicles are utilized, they normally must be able to transport various loads – and it is therefore necessary to determine the transport combination to the load in the best possible way. PST/SL-E can be combined with all vehicles of the SL-family, regardless of whether they are intended to be self-propelled or towed heavy-duty modules. Combined with its enormously high traction force and electronic multiway steering, the PST/SL-E is always your vehicle of choice when exceptional performance and maximum flexibility are required.








**1-804-814-4844** [info@KitchensEquipment.com](mailto:info@KitchensEquipment.com)  
[www.kitchensequipment.com](http://www.kitchensequipment.com)



### Technical Data Sheet:

- longitudinally and laterally combinable bogie module
- box-shaped center frame with integrated air tanks
- high point load capacity on center frame and closed chassis outer fields
- in front and at rear bolt-ear-coupling for longitudinal combinations
- pendular wheelsets mounted onto the chassis by means of ball bearing slewing rings
- turning activation by hydraulic worm-gear drives
- hydrostatic drive integrated into the wheel set
- tires 215/75 R 17.5 (8 per axle line)
- hydraulic axle stroke +/- 300 mm
- hose rupture safety valves on all wheelsets
- maximum steering angle +/- 135° in all driving heights
- Electronic Multiway Steering System with different steering modes
- two-line all-wheel air brake and spring-loaded parking brake

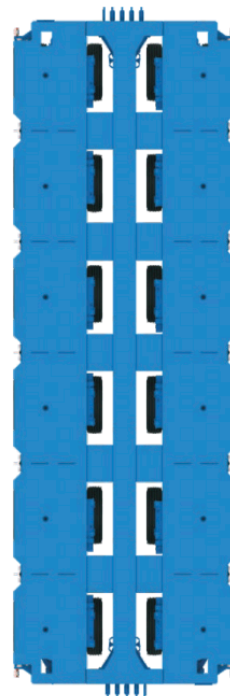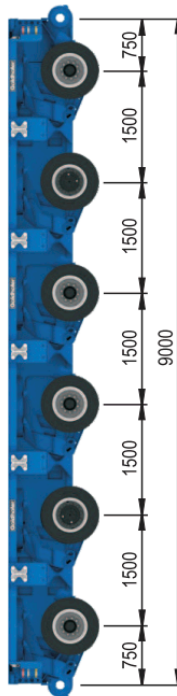

Speed (km/h)	Axle load (kg)	Net weight (kg)	Payload (kg)	Tractive force (kN)
0,5	45.000	25.580	244.420	320
1	42.200	25.580	227.620	320
5	36.600	25.580	194.020	320
10	31.400	25.580	162.820	320
15	28.700	25.580	146.620	320